



knowledge exchange power

Ultra Short Throw Short Throw Projector

Series

LW 22 / LW 24 / LW 28



LW Series LW 22, LW 24 and LW 28 is the special projector with a specially designed lens system for projection distance. LW Series have the special lens to make the image larger, even in limited space. Moreover LW Series is class designed with platinum grade to film on multifunctional, easy to use and as state of art projector on today.

- 3LCD Projector
- High Contrast with 3000:1
- Plenty Port (VGA/Audio/YCbCr/Video/S-Video/HDMI/RJ45)
- Secure power Lamp
- 5,000 Hrs lamp life
- Top lamp Replace
- Empowered by Pixelwok DNX
- Support UXGA Resolution
- Off to Go feature



SHORT THROW PROJECTOR



Features

1. Digital Zoom in 14x, out 7x
2. Source auto researching
3. On Screen Menu
4. Auto Turn off @ non-source
5. Anchor Lock / Kensington
6. User-Defend Boot Logo
7. Blackboard & Colorboard Mode
8. Password Initialization
9. Keypad Lock
10. Top Lamp Replace
11. Turnoff Smart preventative
12. Image Freezer
13. Image Enlarge & Moving

Remote Control (Card Type)

Speaker Stereo 6W (2x3W)


OSD Languages

English, Spanish, Italian, French, Japanese, Chinese, Russian, Korean, Portugese, Thai etc (19 languages)

Standard Accessories

User Manual (CD), Power Cord, Remote Control & battery, VGA Cable, Carrying Bag, Lens Cover with String, Warranty Card

Positioning the projector

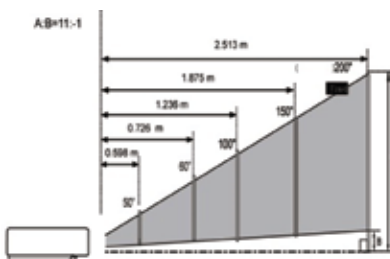

Screen Size (W x H) mm	50"	60"	100"	150"	200"
4:3 Scale Ratio	1016 x 762	1219 x 914	2032 x 1524	3048 x 2286	4064 x 3048
Fixed Zoom	0.598 m	0.726 m	1.236 m	1.875 m	2.513 m

SPECIFICATIONS

LW 22

LW 24

LW 28

Display Technology	Liquid Crystal Display Panel		
Display Panel	0.63" TFT active matrix type, 3 panels		
Brightness (ANSI Lumens)	3100	3300	3500
Native Resolution	XGA (1024x768)		
Contrast Ratio	3000 : 1		
Projection Lens	F 1.8, f=8.08mm with fixed focus		
Uniformity	85%		
Throw Ratio	81.5" @ 1M	80" @ 0.57M	
Throw Distance	0.59 - 1.36M	0.36M-0.63M	
Scale Ratio	4:3 (Standard) / 16:9 (Compatible)		
Keystone	Auto/Manual Keystone, +-15°	+-10°	
I/O Port			
- Computer (Input)	✓	✓	✓
- Computer (Output)	✓	✓	✓
- Component Pb/Cb, Pr/Cr Y or C-Video	✓	✓	✓
- S-Video (Input)	✓	✓	✓
- Mini Jack audio (Input)	✓	✓	✓
- Mini Jack audio (Output)	-	-	✓
- Audio L/R (Input)	✓	✓	✓
- RS232	✓	✓	✓
- RJ45	-	✓	✓
- HDMI A type 19 pin	-	✓	✓
- USB	-	-	✓
PC Compatibility	VGA, SVGA, XGA, SXGA, WXGA, UXGA		
Video Compatibility	Auto/ PAL/ SECAM/ NTSC/ NTSC4.43/ PAL-M/ PAL-N & Auto 1035i/ 720p/ 576p/ 480p/ 576i/ 480i/ 1080i/ 1080p		
Image Size (Diag.)	Adjustable from 50" to 110"	60"-100"	
Lamp	230 W	215 W	
Lamp Life (Normal/Economic)	4000hrs / 5000hrs	4000hrs / 6000hrs	
H-Synch Range	15~100KHz		
V-Synch Range	48~85 Hz	48 ~ 120 Hz	
Speaker	3W RMS 4ohm, *2	10W x 1	
Standby Power	1 W		
Power Consumption	280 W		
Power Supply	AC 100-240 V (3.8A max.), 50/60 Hz		
Operating Temp.	41 F°-95 F°(5 C°-35 C°)		
Store Temp.	14 F°-140 F°(-10 C°-60 C°)		
Net Weight	3.7 kg.	4.9 kg.	
Warranty	2 years, Lamp warranty 1 year or 1,000 hrs whichever comes first		

* Feature and Specifications are subject to change without notice.



knowledge exchange power

บริษัท สยามเทค แอนด์ ดีไวส์ จำกัด

16/60 ถ.ติวานนท์ ต.บางพูด อ.ปากเกร็ด จ.นนทบุรี 11120

โทร. 0-2582-2285 แฟกซ์. 0-2582-2286

http://www.gygar.com